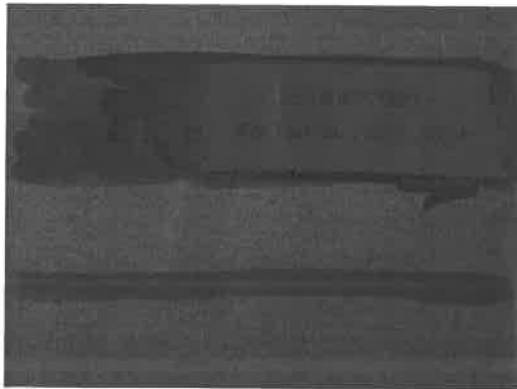


for

Verotex Industries BV  
 Edisonweg 3  
 Veghel  
 5466 AR  
 Nederland

<b>Customer Order No:</b>		<b>Job Reference:</b>	NZ18911099
<b>Supplied by:</b>	Not specified	<b>Date Work Confirmed:</b>	18/09/2019
<b>Supplying to:</b>	Not specified	<b>Date Completed:</b>	27/09/2019
<b>Description of Sample Submitted:</b>	Catania	<b>Unique Reference/Identifier:</b>	Batch: 69813

**TESTING OF FLAMMABILITY**


The samples tested in this report have been assessed against the requirements of the specifications listed for the **SELECTED TESTS ONLY**. Statements of compliance against any specification relate exclusively to the sample tested as requested by the client and may not be representative of full specification testing:

The Furniture and Furnishings (Fire) (Safety) Regulations 1988  
 Schedule 4 Part 1 & Schedule 5 Part 1 and  
 The Furniture and Furnishings (Fire) (Safety) (Amendment) Regulations 1989

Comply

**Additional comments/information (if relevant)**

The sample was subjected to water soaking.  
 Weight of fabric 470.0 g/m<sup>2</sup>.



Ryan Kelly  
 Flammability Technician



Dr Victoria Addy  
 Technical Director

**CERTIFICATE OF ANALYSIS**

**IGNITABILITY TESTING TO BS 5852: PART 1:1979 AS SPECIFIED IN SCHEDULE 4, PART 1 (THE CIGARETTE TEST) and SCHEDULE 5, PART 1 (THE MATCH TEST) OF THE FURNITURE AND FURNISHINGS (FIRE) (SAFETY) REGULATIONS 1988**


*The following test results relate only to the ignitability of the combinations of materials under the particular conditions of test; they are not intended as a means of assessing the full potential fire hazard of the materials in use.*

<b>SMOULDERING CIGARETTE TEST</b>	<b>Initial test</b>	<b>Second test</b>
Progressive smouldering within one hour of cigarette placement?	No	No
Flaming?	No	No

<b>BUTANE FLAME TEST</b>	<b>Initial test</b>	<b>Second test</b>
Flaming ceased at (seconds)	1 second(s)	1 second(s)
Flaming still in progress 120 seconds after removal of ignition source?	No	No
Progressive smouldering?	No	No
Compliance with the requirements of the Furniture & Furnishings (Fire) (Safety) Regulations 1988 (as amended)	Complies	Complies

Filling type: VP45 Non FR modified foam with a density of 20-22 Kg/m<sup>3</sup>

**Testing Image**

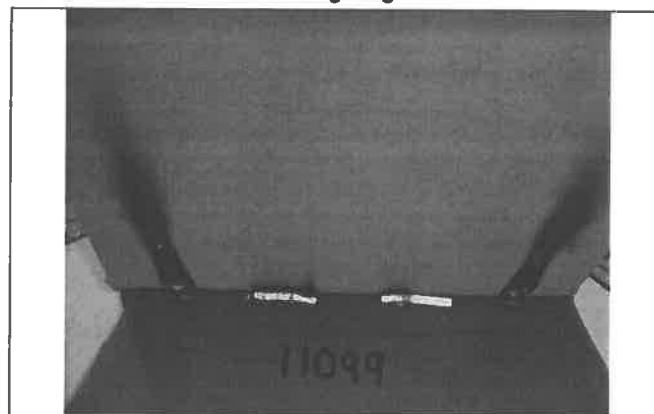

**STANDARD TECHNICAL NOTES**  
(all may not be applicable)

Terms and Conditions	Our Terms and Conditions of Testing can be found at <a href="http://www.bcleathertech.com">www.bcleathertech.com</a>
†	Tests within the scope of accreditation
SC	Test performed by a competent, Eurofins   BLC approved partner laboratory