

Document number:	202201929	Report date:	26/09/2022
Fabric reference:	Jaipur		
	01-Metal	Date analyses:	26/09/2022
Customer:	Verotex Industries	Place analyses:	Labotex
	Edisonweg 3	Date of request:	15/06/2022
	5466 AR Veghel	Samples received:	29/06/2022
	Netherlands		

Testing and conditioning in standard atmosphere, T (20±2)°C and RH (65±4)%

Specification

Results

Remarks

!

Burning behaviour of fabrics for curtains drapes

EN 1101


Test EN1101 is performed after subjecting the fabric to 1 washing cycle,
based on the recommended washing instructions.

EN13773

conditioning min 24h in
standard atmosphere

used gas: propane
flame height: 40mm
bottom edge ignition:
size EN1101: 200x80mm
size EN13772: 560x170mm

flowchart EN13773

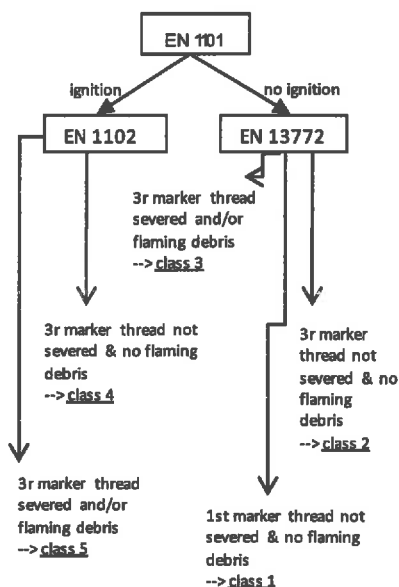

flame application time	warp	weft
1s	no ignition	no ignition
2s	no ignition	no ignition
3s	no ignition	no ignition
4s	no ignition	no ignition
5s	no ignition	no ignition
10s	no ignition	no ignition
15s	no ignition	no ignition
20s	no ignition	no ignition
Mean ignition time warp:	0.0	
Mean ignition time weft:	0.0	
Minimum ignition time:	0.0	

Report EN13773

Document number:	202201929	Report date:	26/09/2022
Fabric reference:	Jaipur		
	01-Metal	Date analyses:	26/09/2022
Customer:	Verotex Industries	Place analyses:	Labotex
	Edisonweg 3	Date of request:	15/06/2022
	5466 AR Veghel	Samples received:	29/06/2022
	Netherlands		

Testing and conditioning in standard atmosphere, T (20±2)°C and RH (65±4)%

Specification	Results				Remarks
EN13772 before washing					
warp	face	reverse	reverse	reverse	
1st marker thread severed	no	no	no	no	conditioning not according to standard
2nd marker thread severed	no	no	no	no	
3rd marker thread severed	no	no	no	no	
time to severance 3rd marker thread (s)	0	0	0	0	
destroyed length (mm)	159	138	111	155	
flaming debris	no	no	no	no	
weft	face	reverse	face	face	
1st marker thread severed	no	no	no	no	
2nd marker thread severed	no	no	no	no	
3rd marker thread severed	no	no	no	no	
time to severance 3rd marker thread (s)	0	0	0	0	
destroyed length (mm)	140	163	146	148	
flaming debris	no	no	no	no	
EN13772 after washing					
warp	face	reverse	reverse	reverse	
1st marker thread severed	no	no	no	no	
2nd marker thread severed	no	no	no	no	
3rd marker thread severed	0	0	0	0	
time to severance 3rd marker thread (s)	0	0	0	0	
destroyed length (mm)	102	130	178	160	
flaming debris	no	no	no	no	
weft	face	reverse	face	face	
1st marker thread severed	no	no	no	no	
2nd marker thread severed	no	no	no	no	
3rd marker thread severed	0	0	0	0	
time to severance 3rd marker thread (s)	0	0	0	0	
destroyed length (mm)	160	156	147	169	
flaming debris	no	no	no	no	



Report EN13773

Document number:	202201929	Report date:	26/09/2022
Fabric reference:	Jaipur		
	01-Metal	Date analyses:	26/09/2022
Customer:	Verotex Industries	Place analyses:	Labotex
	Edisonweg 3	Date of request:	15/06/2022
	5466 AR Veghel	Samples received:	29/06/2022
	Netherlands		

Testing and conditioning in standard atmosphere, T (20±2)°C and RH (65±4)%

Specification

Results

Remarks

!

Classification

Class 1	X
Class 2	-----
Class 3	-----
Class 4 or 5	-----



Labotex certifies that the results mentioned in this report are obtained after testing in accordance with the procedure and equipment specified by the concerned standards, unless noted differently.

Annick Gijsemans - Laboratory Manager

Labotex has the competence to perform tests in accordance with the requirements of standard NBN EN ISO/IEC 17025. The scope of this accreditation can be consulted on the BELAC website https://ng3.economie.fgov.be/Nl/belac/labotesting/applic/accreditedc_nl.asp?certificatienummer=364-TEST

Sampling is performed by the customer. Fabric analysed as received. The results in this report only relate to the tested items.

Samples will be returned to the customer together with the certificate, if possible. Samples will not be retained, unless specified by the customer. Retained samples will be kept for maximum one year unless a specific retention period is necessary.

This report cannot be copied unless in its complete form and with written approval of Labotex (Kontich).

Uncertainty of measurement on the test result is not taken into account when assessing compliance with the specifications. When results are compliant to the specification, the square next to the result is empty. When the result is not compliant to the specification, the square is filled with a flag "F".

The uncertainty and the description of the methods are available at the lab on request.